


Good reasons to insist on Power Team Generation IV Inflatable Jacks:

- Space age reinforced, multi-layer aramid construction, widely overlapping on all sides. Tested at 175 psi.
- Non-conducting material resists oil, ozone and most chemicals. Cold resistant down to -40° F, heat resistant up to 240° F (short term) or 200° F (long term).
- Field-replaceable nipples are made of tough steel, with internal thread to prevent abrasion damage. Ideal needle aperture of 0.25" allows rapid inflation, without risk of icing, and permits a safe lowering speed.
- Inflation hose system is color-coded (red and yellow) for Easy recognition when using more than one jack.
- The controller, shut-off and air hoses are all equipped with USA industrial interchange style air couplers. Female half coupler bodies have a locking collar, protecting operator from accidentally disconnecting jack while under load.
- Single jack controller with "dead man" control (3500090). Can be used individually, or in multiples to regulate any number of jacks desired.
- Uninflated jacks are only 1" thick, making seemingly impossible lifting tasks routine. Any non-explosive gas or water can be used for inflation.
- Surface of jack has a non-skid pattern, assuring that the jack won't "walk away" from the job. Jacks can be used to lift a load from an uneven surface, are tolerant of side-loaded applications.
- Heavy attachment straps are provided for attachment of a rope or hook to position the jack from a safe distance.

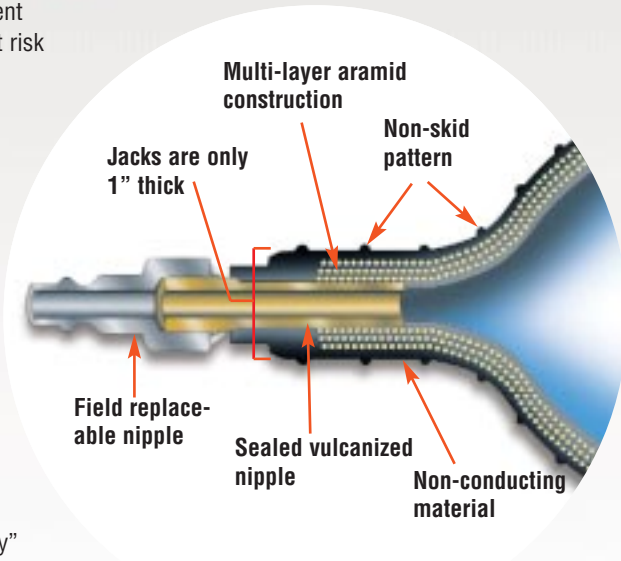

No task too tough for Power Team to tame...

Power that lifts machinery...removes gears and bearings...bends and straightens...raises bridges and structures...cuts and punches...spreads pipe flanges...splits rusted-on nuts...bends rebar...pre-stresses and post-tensions. All of these tasks and countless others can be tamed with Power Team power. Ask your Power Team distributor for our new PT99 catalog... 180 pages of problem solving products.



SPX FLUID POWER

UNITED STATES
 SPX Corporation
 5885 11th ST
 Rockford, IL 61109-3699
 Telephone: 1-815-874-5556
 FAX: 1-815-874-7853

AUSTRALIA
 7 Expo Court
 Mount Waverley
 Victoria 3149
 Australia
 Tel: 61 (3) 95628800
 FAX: 61 (3) 95628080
 E-mail:
 spxaust@hotmail.net.au

BRAZIL
 Av. N Sra. do Sabará, 4901
 São Paulo, SP 04447-021
 Brasil
 Tel: 55 (11) 246-4177
 FAX: 55 (11) 246-2793

Technical Services
 Tel: 1-800-477-8326
 FAX: 1-800-765-8326

EUROPE
 Klarenanstelerweg 5 D
 6468 EP Kerkrade
 Netherlands
 Tel: 31 (45) 5678877
 FAX: 31 (45) 5678878
 E-mail:
 power.team.nl@wxs.nl


FAR EAST
 36 Joo Koon Circle
 Singapore 629061
 Singapore
 Tel: (65) 862 2522
 FAX: (65) 862 4633
 E-mail:
 pwr_team@pacific.net.sg

JAPAN
 5-53 Minowacho
 2 Chome,
 Kohoku-ku, Yokohama,
 Kanagawa 223-0051
 Japan
 Tel: 81 (45) 562-7700
 FAX: 81 (45) 562-7800

KOREA
 Anyang P.O. Box 50
 Kyonggi-Do
 South Korea 430-600
 Tel: 82-343-391-0209
 FAX: 82-343-396-5373
 E-mail:
 ptkor@mail.hitel.net

UNITED KINGDOM
 Churchill Way,
 High March
 Daventry,
 Northants NN11 4NF
 United Kingdom
 Tel: 44 (0) 1327 303495
 FAX: 44 (0) 1327 871586
 E-mail:
 ptuk@powerteam.com

INTERNET
 http://www.powerteam.com



Printed in USA 3/01


© Copyright 2001 SPX Power Team, Rockford, IL 61109-3699



www.powerteam.com

INFLATABLE JACKS

Generation IV

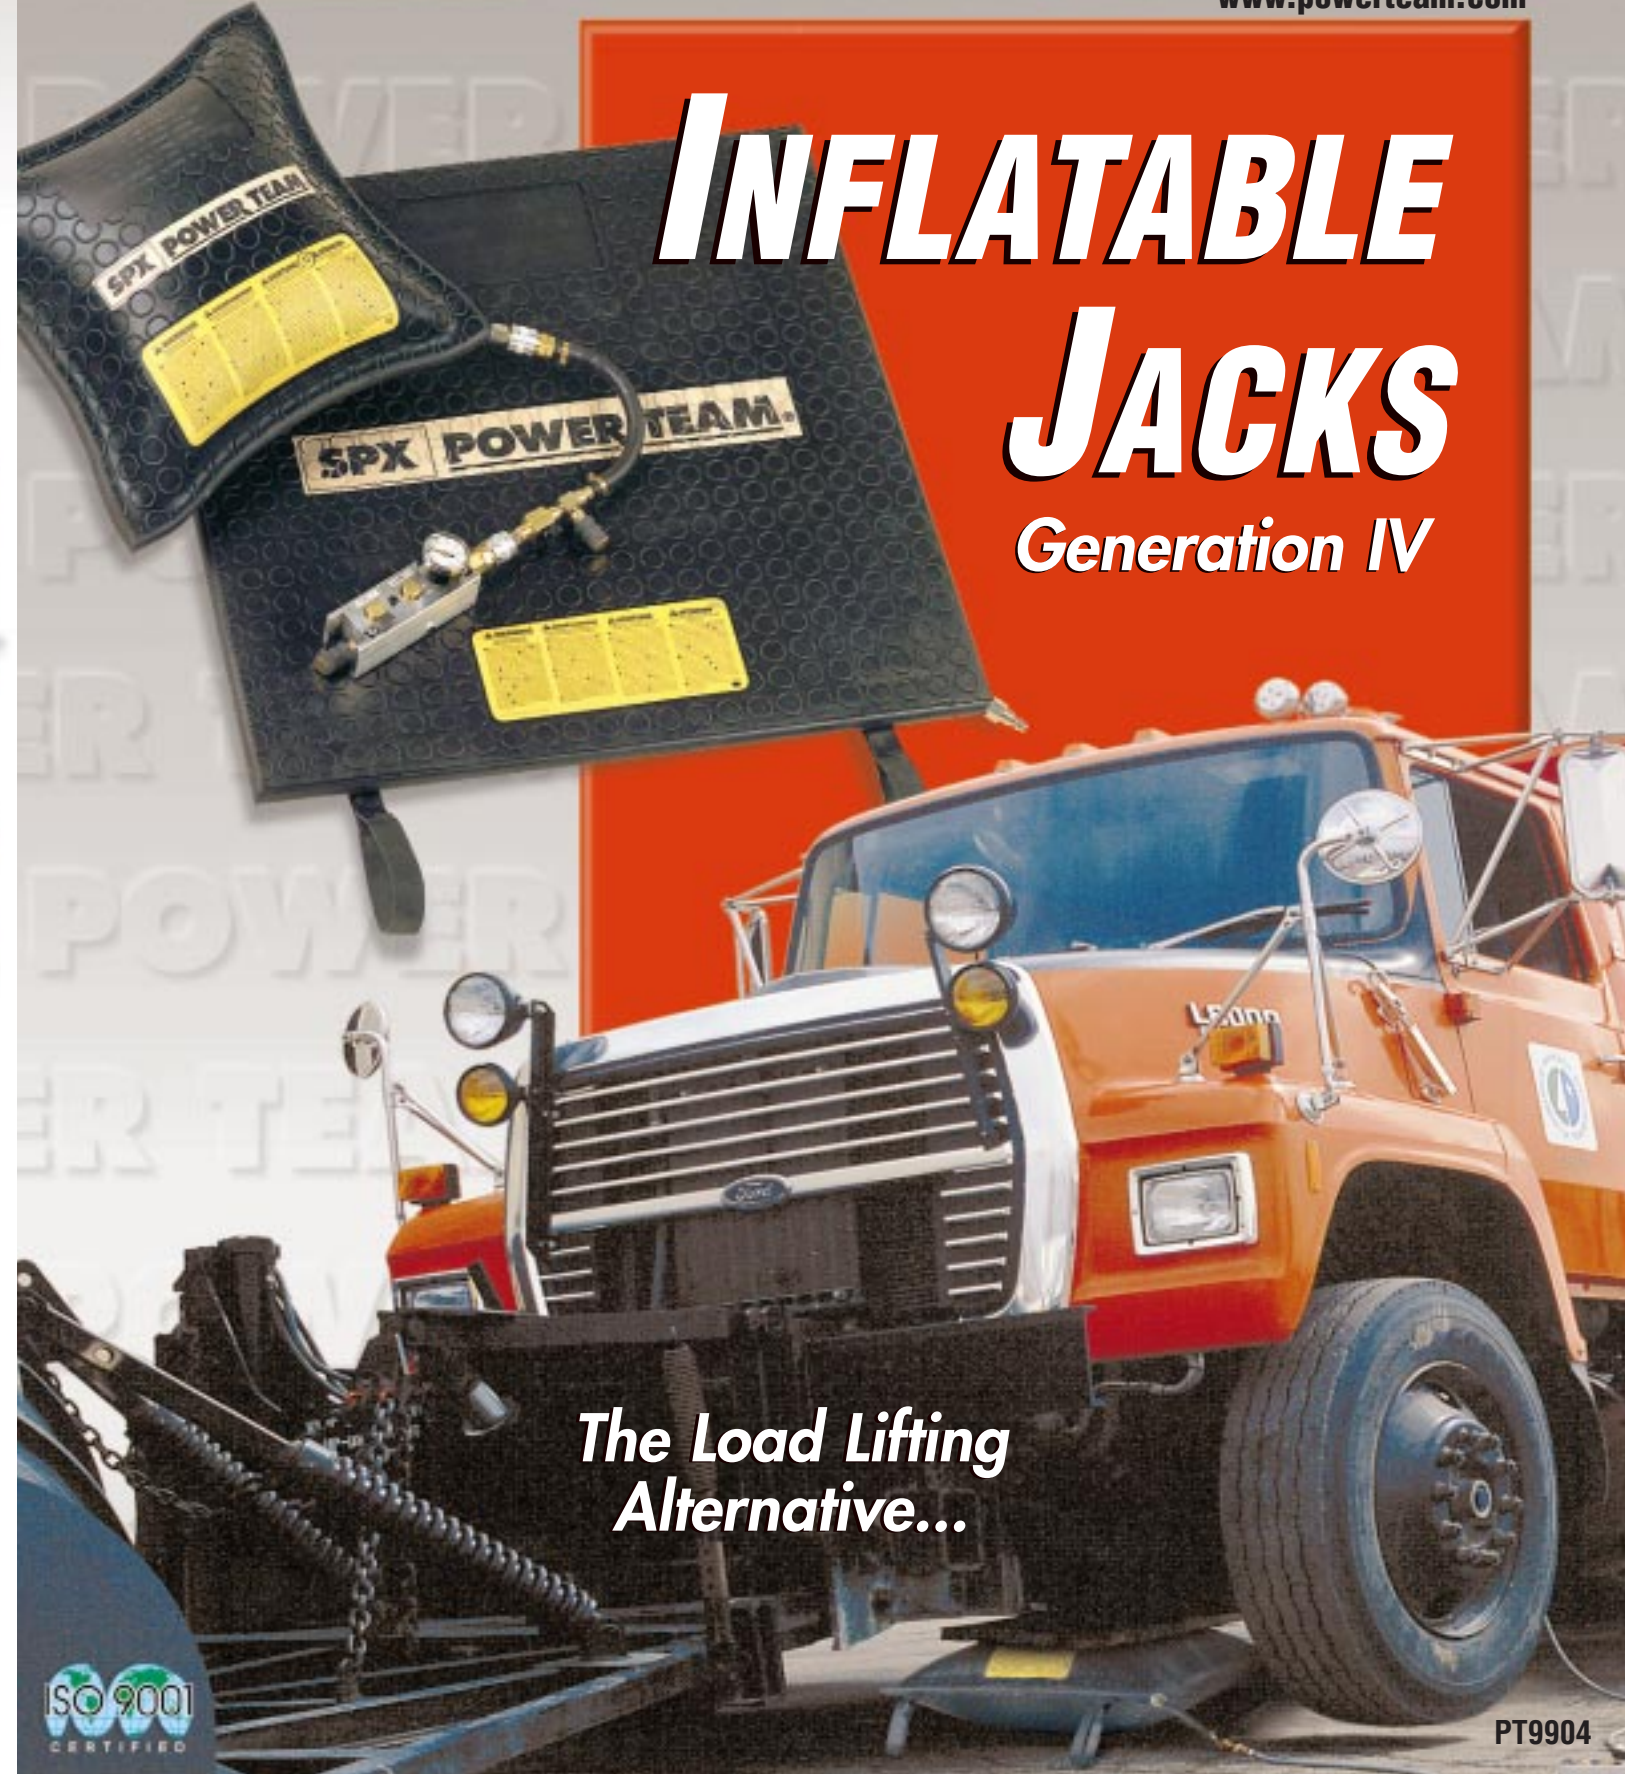

The Load Lifting Alternative...



PT9904